A floating boat house, such as this one offered by the Dow Chemical Company, is desirable in most climates to protect pleasure and patrol craft from the elements. Styrofoam, which provides the flotation, may be given protection by covering with thin aluminum sheeting or with waterproof plywood or composition board specially treated.

Bracing between roof rafters and sidewall studding is important to offset wave torsion.

Walkway decking should be spaced to provide good drainage.

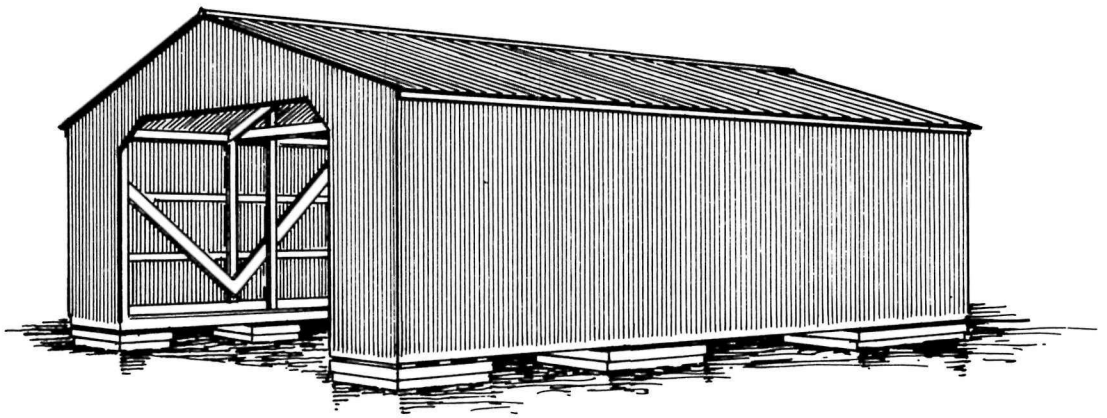

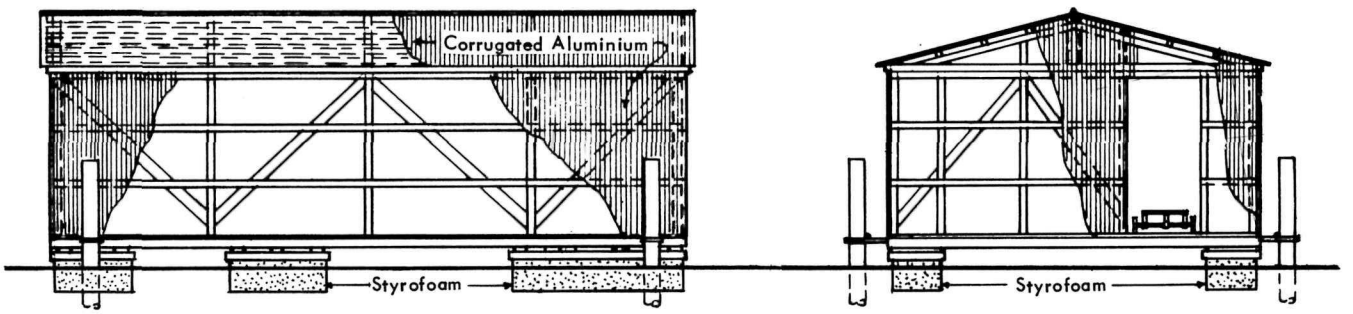

SIDE ELEVATION

REAR ELEVATION

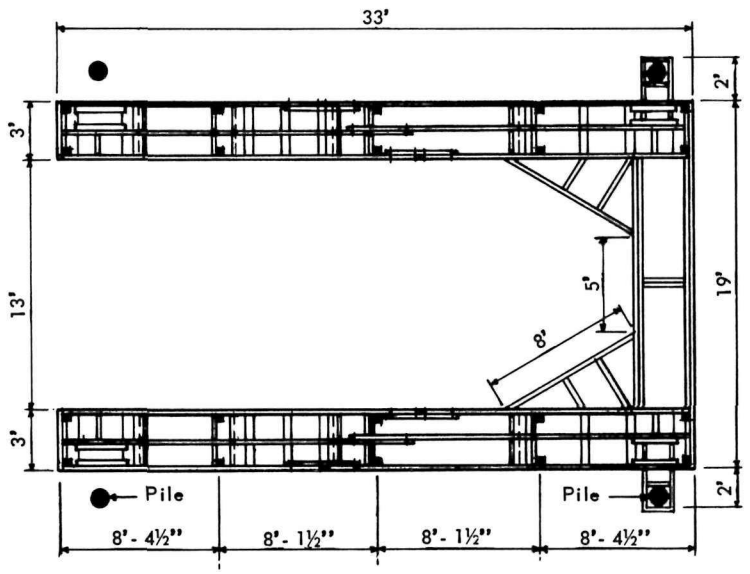

PLAN

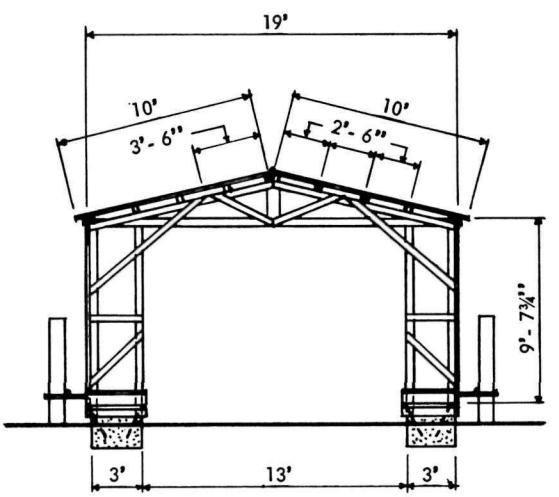

FRONT ELEVATION

0' 15'

The National Conference on State Parks in cooperation with *The National Park Service*			FLOATING BOATHOUSE
date January 1964	plate 347 H		DOW CHEMICAL COMPANY Midland, Michigan
index R-4751	control N-0441-R		