


Regulation cross section

*Cross section before
water breaks*

Regulation cross section.

*Substitute for regulation
cross section in R, 3 or else-
where if erosion is bad.*

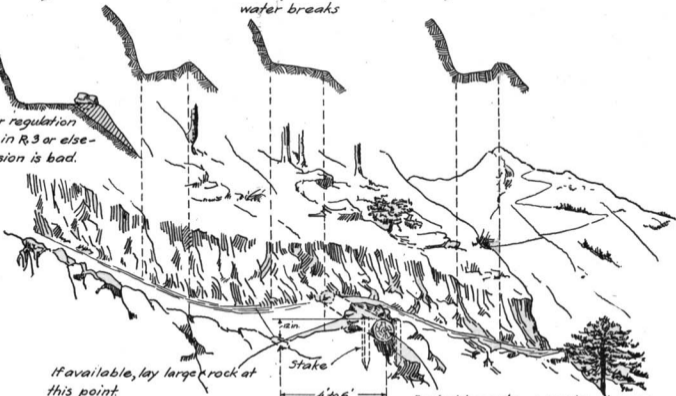

*If available, lay larger rock at
this point.*

*Slight reverse curve beginning
4 ft. to 6 ft. from log.*



*Buried log or large rocks at apex
of reverse grade set 6" to 8" into bank.
Place at angle of about 4" to 1'
instead of straight across trail.*