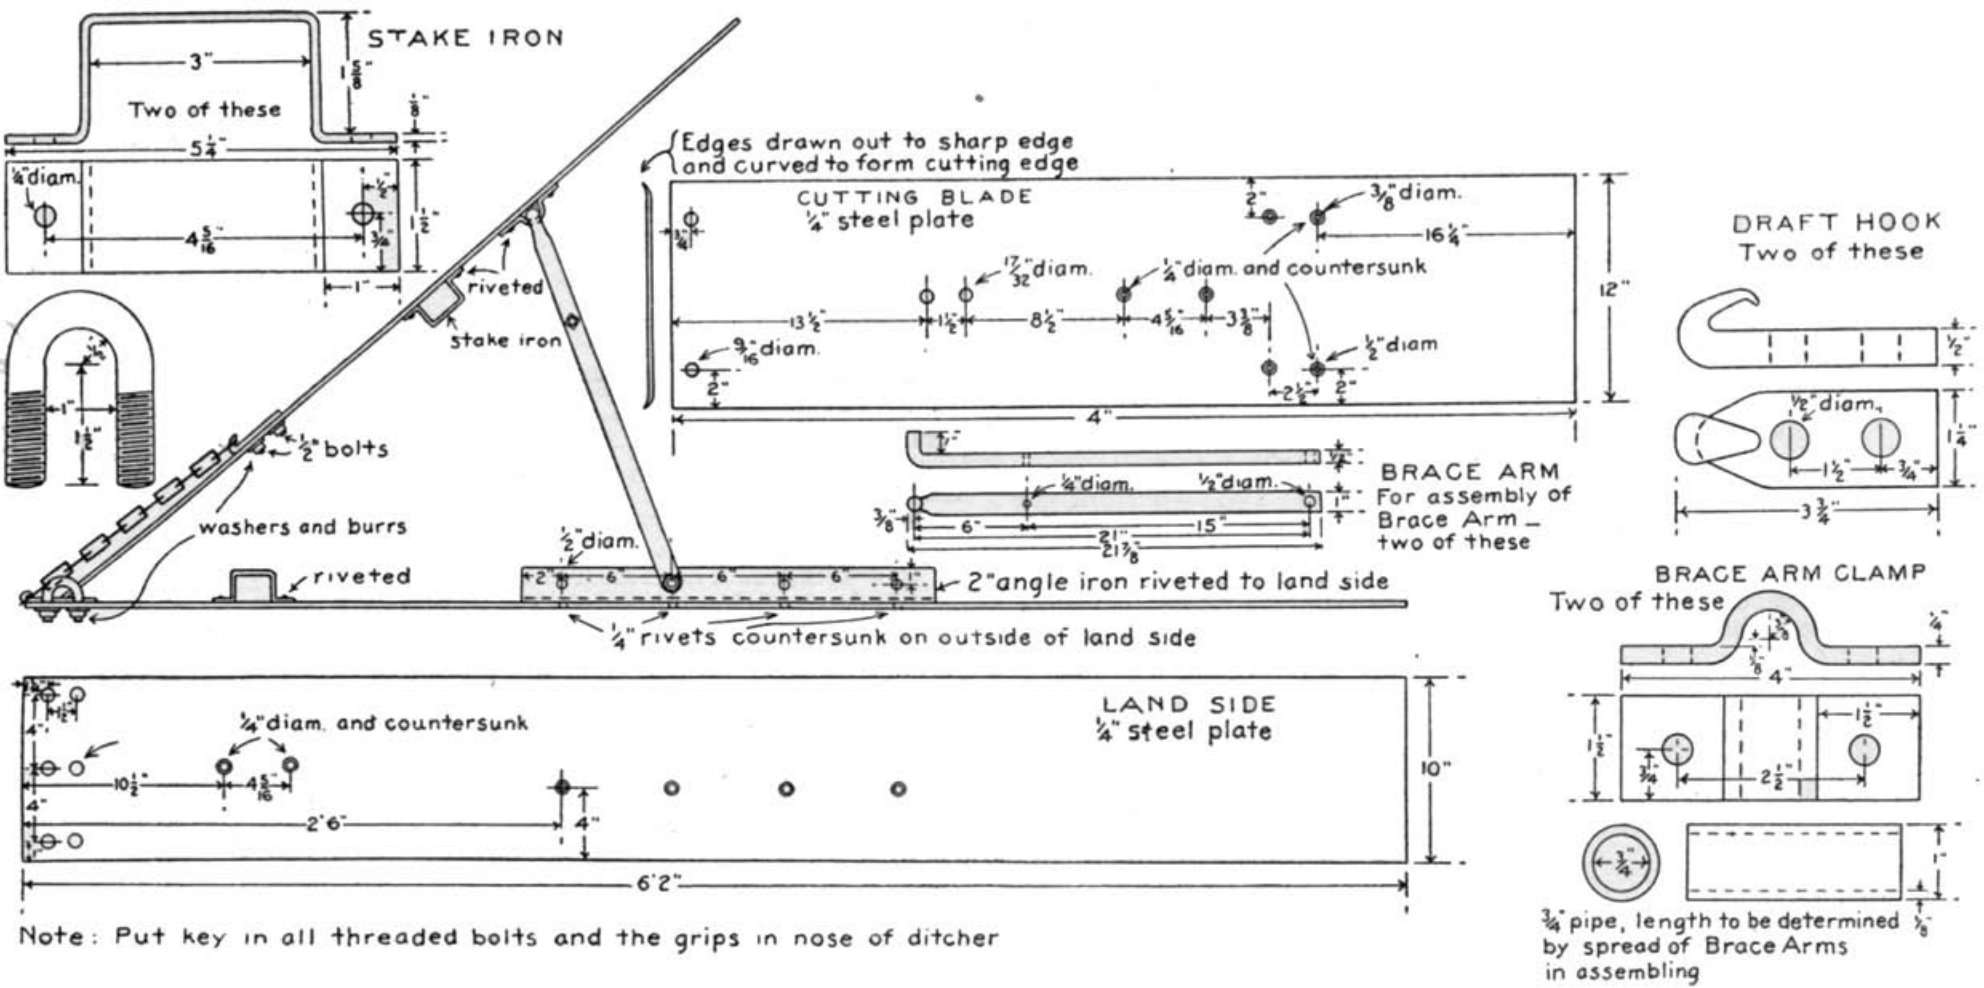

Note: Put key in all threaded bolts and the grips in nose of ditcher